




- H.265+/H.265 dual-stream video compression.
- Supports Full-channel AI-Coding.
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs.
- Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth.
- Up to 8 channels video stream (analog channel) Perimeter Protection
- Up to 16 channels video stream (analog channel) SMD Plus.
- Up to 2 channels video stream (analog channel) human face recognition.
- IoT & POS functionalities.

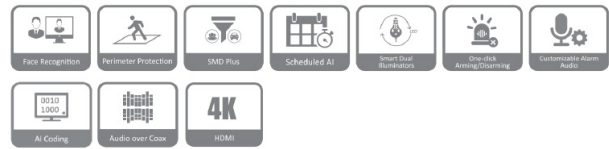

## System Overview

Launched by Osiris Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Osiris's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

## Functions

### Face Recognition

Osiris Face Recognition technology extracts the features of captured faces and compares them with that in face database to recognize the person identity.

\*The Face Recognition is conflicted with SMD Plus and Perimeter

### Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

### SMD Plus

With intelligent algorithm, Osiris Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

### Scheduled AI

This technology allows multiple AI functions to be set for one channel based on time frames, eliminating the need to manually configure the system to switch between functions each time. Scheduled AI greatly increases efficiency and widens the number of scenarios that the device can be used in.

### Smart Dual Illuminators

With Smart Dual Illuminators technology, you can select Smart Illumination Mode for the system to automatically switch between IR mode and white light mode. It allows white light to be turned on when a target is detected by the SMD Plus/Perimeter Protection function of AI-enabled XVR. This significantly reduces light pollution at night. Together with other modes, including IR Mode and White Light Mode, the smart dual illumination technology can meet the requirements of a wide variety of scenes.

### One-click Arming/Disarming

With just one click, you can enable or disable alarm linkages to show messages, send emails, output audio alarms and more, through the mobile app and platform.

### Customizable Alarm Audio

Designed for your convenience, the TiOC alarm can be customized to meet your needs. It is flexible, allowing you to directly upload your customized audio through the mobile app and XVR.

### AI Coding

Compared with H.265/H.264, AI coding can reduce more than 50% bit rate and storage requirements without loss of decoding compatibility, providing clear human and vehicle details.

### Audio over Coax

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

### Technical Specifications

System	
Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI
Perimeter Protection	
Perimeter Performance AI by Recorder (Number of Channels)	<ul style="list-style-type: none"> <li>Advanced Model: 2 channels, 10 IVS for each channel</li> <li>General Model: 8 channels, 10 IVS for each channel</li> </ul>
Face Detection	
Face Attributes	Gender; age group; glasses; expressions; face mask; beard
Face Detection Performance of AI by Recorder (Number of Channels)	2 channels (up to 12 face images/s)
Face Recognition	
Face Database Capacity	Up to 10 face databases with 20,000 face images in total. Name, gender, birthday, address, certificate type, certificate No., countries&regions and state can be added to each face picture
Face Recognition Performance of AI by Recorder (Number of Channels)	2 channels
SMD Plus	
SMD Plus by Recorder	16 channels: Secondary filtering for human and motor vehicle SMD Plus, reducing false alarms caused by leaves, rain and lighting condition change
Audio and Video	
Analog Camera Input	16 channel BNC: adaptive access by default; HDCVI, AHD, TVI and CVBS access can be configured.
Camera Input	1. CVI: 4K, 6MP, 5MP, 4MP, 1080P@25/30fps, 720P@50/60fps, 720P@25/30fps. 2. TVI: 4K, 5MP, 4MP, 3MP, 1080P@25/30fps, 720P@25/30fps. 3. AHD: 4K, 5MP, 4MP, 3MP, 1080P@25/30fps, 720P@25/30fps
IP Camera Input	Up to 32 channels of IPC access 16 IP channels by default + 16 channels (analog channels are converted to IP channels) incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps *After IP channels are added beyond the existing channels, the AI Function (IVS, SMD, FACE) will be disabled.
Encoding Capacity	Main stream: All channels 4K@(1-7fps); 6MP@(1-10fps); 5MP@(1-12fps); 4K-N/4MP/3MP@(1-15fps); 4M-N/1080P/720P/960H/D1/CIF(1fps-25/30fps); Sub stream: 960H@(1fps-15fps); D1/CIF@(1fps-25/30fps)


Dual-stream	Yes
Video Frame Rate	PAL: 1 fps-25 fps. NTSC: 1 fps-30 fps.
Video Bit Rate	32 Kbps-6144 Kbps Per Channel
Audio Sampling	8 KHz, 16 bit
Audio Bit Rate	64 Kbps
Bit Rate Type	Video stream and composite stream.
Video Output	1 HDMI ,1 VGA HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 *Simultaneous/heterogeneous video sources output for VGA and HDMI is configurable.
Multi-screen Display	When IP extension mode not enabled: 1/4/8/9/16 When IP extension mode enabled: 1/4/8/9/16/25/36
Third-party Camera Access	Onvif, Panasonic, Sony, Axis, Arecont, Pelco, Canon, Samsung
Compression Standard	
Video Compression	AI Coding/H.265+/H.265/H.264+/H.264
Audio Compression	G.711A/G.711u/PCM
Network	
Network Protocol	HTTP, HTTPS, TCP/IP, IPv4, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS, P2P
Mobile Phone Access	iPhone, iPad, Android
Interoperability	ONVIF 21.06, CGI
Browser	Chrome, IE9 or above, Firefox
Network Mode	Single-address mode
Recording Playback	
Record Mode	General, motion detection; intelligent; alarm; POS
Recording Playback	When the AI Function (IVS, FACE) is not enabled: 1/4/9/16 When the AI Function (IVS, FACE) is enabled: 1/4/9
Backup Method	USB device and network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection)
Recording Playback	
General Alarm	Motion detection, Video Loss, tampering, and local alarm
Anomaly Alarm	No disk, disk error, low space, offline, ip conflict, MAC conflict
Intelligent Alarm	Face detection, face recognition, perimeter protection
Alarm Linkage	Record, snapshot (panoramic), IPC external alarm output, access controller, voice prompt, buzzer, log, preset, email

## OS-XVR16FN8-5H2-4K-V3 | 16 Channels Penta-brid 4K-N/5MP 1U 2HDDs WizSense Digital Video Recorder

Ports	
Audio Input	1, RCA (external) 8, BNC (coaxial)
Audio Output	1, RCA
Two-way Talk	Yes (share the same audio input with the first channel)
HDD Interface	1 SATA Port, up to 16TB, the maximum HDD capacity varies with environment temperature
RS-485	1 Port, for PTZ Control
USB	2 (1 front USB 2.0 port, 1 rear USB 3.0 port)
HDMI	1
VGA	1
Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)
Operating Humidity	10%–90%
Installation	Desktop
Certifications	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 FCC: Part 15 Subpart B

General	
Power Supply	DC12V, 2A
Power Consumption	Lower than 10 W
Net Weight	0.9 kg ( 1.98 lb)
Gross Weight	• 1.5 kg ( 3.31 lb)
Product Dimensions	Compact 1U, 260.0 mm × 237.9 mm × 47.6 mm 10.24" × 9.37" × 1.87" (W × D × H)
Packaging Dimensions	333.0 mm × 89.0 mm × 315.0 mm 13.11" × 3.50" × 12.40" (W × D × H)
Operating Temperature	−10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	10%–90%
Installation	Desktop
Certifications	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 FCC: Part 15 Subpart B

### Dimensions (mm/inch)

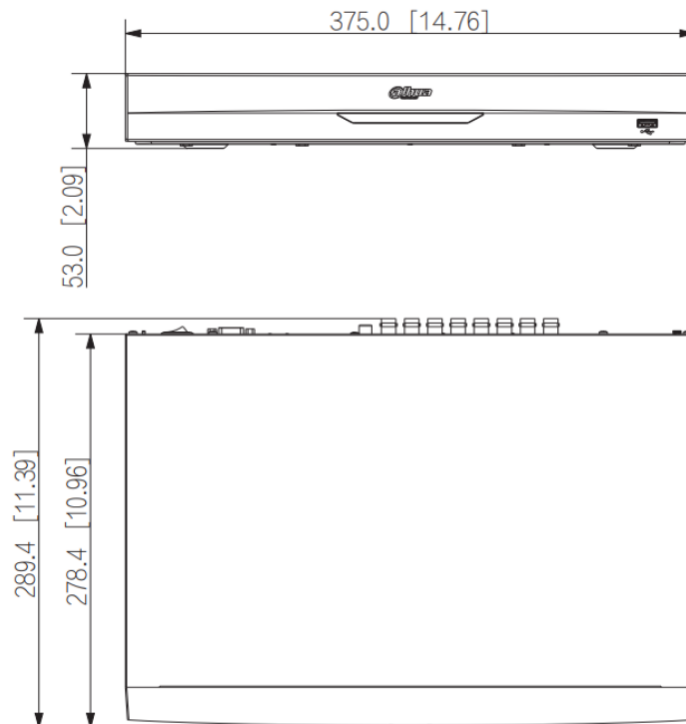

\* The information contained in this document (photos, drawings, dimensions, specifications) may be subject to change without prior notice.

\*\* Copyright© Osiris Security. All rights reserved. The information in this document can not be published, rewritten or republished in any form. If you wish to use the text or images in this document for commercial reasons, please contact marketing@osiris-security.com