



Vertical mounting rails are adjustable throughout the entire depth of the cabinet and have very high carrying capacity with 1.5mm thickness Silk-screen mounting rails are providing ability to count U-Marking from top to down & down to up for easy device installation

Removable side and rear panels allow comfortable and easy access to the installed devices for maintenance from all sides of the cabinet. For active cooling, it is possible to install an optional fan-unit into the roof and/or floor. Due to flat-pack construction it is possible to bring them also into places with difficult access, basement or attic, In the narrow entrance or stairs.

Height : 12U-16U-20U-22U-26U-32U-Width : 600mm Depth: 600mm & 800mm & 1000mm





Elegant NET 600 IT Rack Cabinet

Quick-change fan tray allows accessibility without removing the cables or active devices from the rack in case of any maintenance or replacement needs.

Elegant NET ; Top cover has been designed for ventilation module which can be detached by removing 4 pcs screws from the top in case of maintenance or replacement needs.

Protect your device against overheating by choosing the right fan module.

We offer a wide product range of ventilation units with the different fan modules.

On/Off switch Fan modules Analog or digital Thermostat control unit Fan modules





legant net cabine






Professional Network Cabinets











20





M-Joint cable entry panels located on the top cover designed for easiy cabling and High-density cabling.

Dimensions w: 300 – D: 56 mm

Sliding cable entry panels located on the bottom plates has been designed for easiy cabling and Highdensity cabling by using sliding cable entry panels with the dimensions w: 300 – D: 125 mm

Vertical mounting rails are adjustable throughout the entire depth of the cabinet and have very high carrying capacity with 1.5mm thickness , Silk-screen mounting rails are providing ability to count U- Marking from top to down & down to up for easy device installation



Castors

Castor and/or levelling feet could be mounted on to rack.






Door options / W: 600 mm

full-length smoked and shatterproof glass door deployed in metal frame, easily rotated to the left

The front door is designed to provide security with lock mechanism and decorative view together, or right directions by special spring hinge, in case of needs 3 points and single point locking systems are available depends on customer requirements.

Easiy removable side panels complete with Barrel lock & Sliding latch locks

RAL 9005-Black (Standard Colour) RAL 7035-Light Gray (Optional)

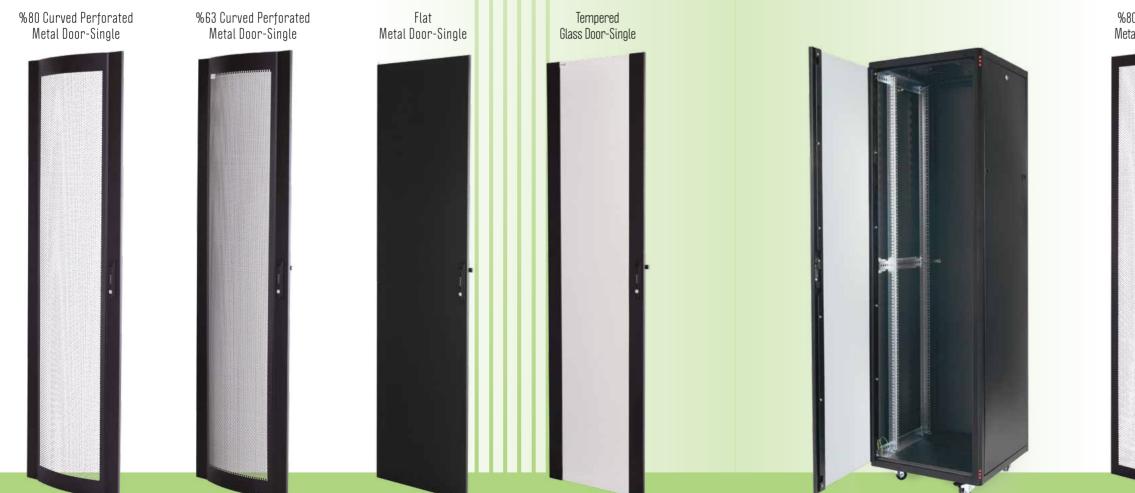





%80 Perforated Metal Door-Double



%63 Perforated Metal Door-Double




Flat Metal Door-Single







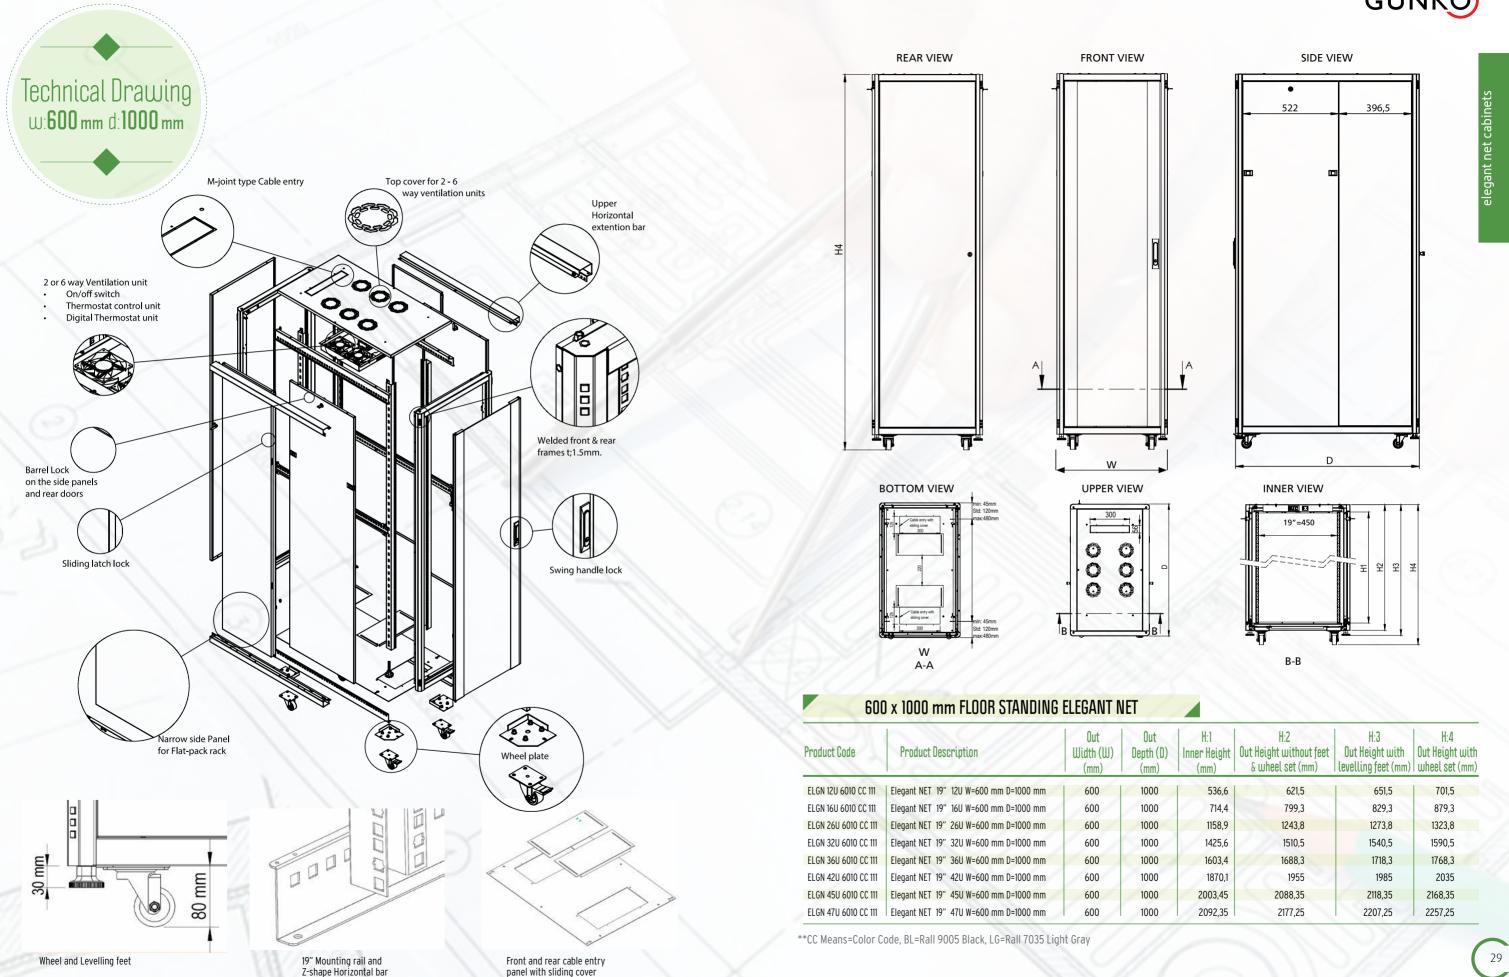




	_			
Out epth (D) (mm)	H:1 Inner Height (mm)	H:2 Out Height without feet & wheel set (mm)	H:3 Out Height with Levelling feet (mm)	H:4 Out Height with wheel set (mm)
1000	536,6	621,5	651,5	701,5
1000	714,4	799,3	829,3	879,3
1000	1158,9	1243,8	1273,8	1323,8
1000	1425,6	1510,5	1540,5	1590,5
1000	1603,4	1688,3	1718,3	1768,3
1000	1870,1	1955	1985	2035
1000	2003,45	2088,35	2118,35	2168,35
1000	2092,35	2177,25	2207,25	2257,25







Elegant Net Provides Economic and Durable Solutions

Benefits Of The Excellent Cabling

- Maximised Cabling Pathsf Or Optized System Performance
- Proper Cabling
- Easy Cabletracing
- Easy Cable Replacing
- Easily Removing Hardware

We believe You deserve the best infrastructure solutions

