

ZANXG-1.5

ZANXG-1.5_Explosion-proof Flexible Conduit




- Stainless steel 316L
- Outlet hole specification: G3/4
- Explosion-proof mark: II 2 G Ex eb IIC Gb, II 2 D Ex tb IIIC Db; Ex eb IIC Gb, Ex tb IIIC Db
- IP66 rated



Scene

The explosion-proof camera is for explosion-proof industrial monitoring. It is mainly used in dangerous environments with explosive gas and dust in the petrochemical industry, such as oil fields, drilling platforms, oil pipelines, oil refineries, chemical plants, explosives warehouses.

Dimensions (mm[inch])

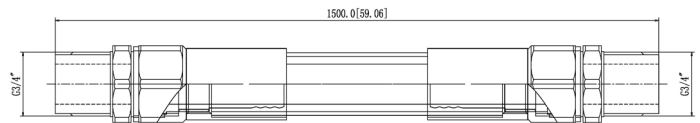

Technical Specification

Certification

| | |
|----------------|---|
| Certifications | ATEX: II 2 G Ex eb IIC Gb, II 2 D Ex tb IIIC Db IECEX: Ex eb IIC Gb, Ex tb IIIC Db |
|----------------|---|

Environment

| | |
|-----------------------|----------------------------------|
| Operating Temperature | -60°C to +100°C (-76°F to 212°F) |
|-----------------------|----------------------------------|

| | |
|--------------------|-------|
| Operating Humidity | ≤ 95% |
|--------------------|-------|

| | |
|------------|------|
| Protection | IP66 |
|------------|------|

Structure


| | |
|--------|---------|
| Casing | SUS316L |
|--------|---------|

| | |
|--------------------|-----------------|
| Product Dimensions | 1.5 m (4.92 ft) |
|--------------------|-----------------|

| | |
|------------|------------------|
| Net Weight | 1.2 kg (2.65 lb) |
|------------|------------------|

| | |
|--------------|------------------|
| Gross Weight | 1.4 kg (3.09 lb) |
|--------------|------------------|

Application

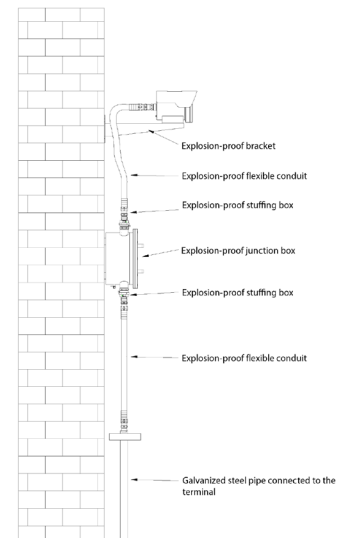

Ordering Information

| Type | Model | Description |
|-------------------------------|-----------|---|
| Explosion-proof Flexible Tube | ZANXG-1.5 | ZANXG-1.5_Explosion-proof Flexible Tube |